


TO REPLACE THE PRINTER PAPER

VERY IMPORTANT: Do not run the entire roll of paper through the printer.

1. Turn the printer on.
2. Press the PAPER ADVANCE BUTTON (located to the right of the paper window) and allow about one inch of paper to advance.
3. Open the door of the paper compartment, roll out the balance and tear off.
DO NOT PULL PAPER OUT BACKWARDS!
4. PULL OUT THE PAPER FROM THE FRONT of the printer using the one inch of paper advanced.

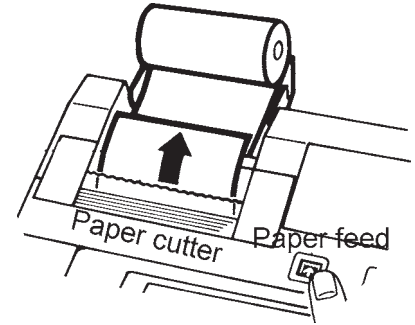

INSTALLING THE PAPER

1. **Cut the edge of the paper roll with scissors.**
2. Open the paper cover on printer.
3. Insert the leading edge of the roll of paper on top of the silver plate located in the paper compartment.
4. Turn the **PRINTER** switch to the "ON" position and press the paper feed button until the paper is fed through the printer platen.

